

# Classification and Calculation of Retinal Blood vessels Parameters

Manjiri B. Patwari  
Institute of  
Management Studies  
& Information  
Technology, Vivekana  
and College Campus,  
Aurangabad MS  
(India)  
[Manjiri.patwari@gmail.com](mailto:Manjiri.patwari@gmail.com)

Ramesh R. Manza  
Dept of CS and  
IT, Dr. B. A. M.  
University,  
Aurangabad MS  
(India)  
[manzaramesh@gmail.com](mailto:manzaramesh@gmail.com)

Yogesh M. Rajput  
Dept of CS and IT,  
Dr. B. A. M.  
University,  
Aurangabad MS  
(India)  
[yogesh.rajput128@gmail.com](mailto:yogesh.rajput128@gmail.com)

Deepali D. Rathod  
Dept of CS and IT,  
Dr. B. A. M.  
University,  
Aurangabad MS  
(India)  
[rathodeepali2@gmail.com](mailto:rathodeepali2@gmail.com)

Manoj Saswade  
Director,  
Saswade Eye  
Clinic"  
Aurangabad MS  
(India)  
[nehad35@gmail.com](mailto:nehad35@gmail.com)

Neha Deshpande  
Director,  
Guruprasad  
Netra  
Rugnalaya pvt.  
ltd, Aurangabad  
MS (India)  
[prachims@yahoo.com](mailto:prachims@yahoo.com)

## Abstract -

In this paper, we present an algorithm for the classification and calculation of retinal blood vessels parameters. Six parameters including Area, Length, thickness, Diameter, Mean Diameter and Tortuosity are calculated. The algorithm proceeds through three main steps 1. preprocessing operations on high resolution fundus images 2. For retinal vessel extraction, simple vessel segmentation techniques formulated in the language of 2D Median Filter 3. Segmentation for finding boundaries of the extracted blood vessels. Performance of this algorithm is tested using the fundus image database( 245 images) taken from Dr. Manoj Saswade, Dr.Neha Deshpande and online available databases diaretdb0, diaretdb1 and DRIVE. This algorithm achieves accuracy of 96% with 0.92 sensitivity and 0 specificity for Saswade database , for diaretdb0 accuracy 95% with 0.95 sensitivity and 0 specificity, for diaretdb1 accuracy 96% with 0.96 sensitivity and 0 specificity, and for DRIVE database 98% accuracy with 0.98 sensitivity and 0 specificity and also used statistical techniques for result analysis, in this techniques used Mean, Standard Deviation, Variance, Covariance, Coefficient etc.

**Keywords - Blood Vessels, 2D Median Filter.**

## 1. INTRODUCTION

Proposed algorithm shows classification and calculation of retinal blood vessels parameters. Six parameters including Area, Length, thickness, Diameter, Mean Diameter and Tortuosity are calculated. In this algorithm we have used the Image Processing techniques for extraction of the retinal blood vessels and then classification and calculations of retinal blood vessels parameters. Firstly we have performed the preprocessing operation on high resolution fundus images. We have used 2D median filter for highlighting the blood vessel. For extraction of the blood vessels we have performed threshold function. Segmentation for detecting boundaries. For observing the result we have taken the images and formed a database from Dr. Manoj


Saswade and Dr. Neha Deshpande (245 images), images from online databases diaretdb0, diaretdb1 and DRIVE.

## 2. METHODOLOGY

Computer assisted diagnosis for various diseases are very common now a days and medical imaging is playing a vital role in such diagnosis. Image processing techniques can help in extractions of blood vessels and bifurcation points. The proposed algorithm has 3 stages, shown in the figure 1. In first stage preprocessing is done to remove the background noise from input fundus image. Blood vessels are highlighted and extracted in the second stage and in the third stage using segmentation technique boundaries are detected.

### 2.1 PREPROCESSING

The Preprocessing is done to remove noise from the background and to enhance the image. We have taken out green channel, because green channel shows high intensity as compare to red and blue. shown in figure 2.

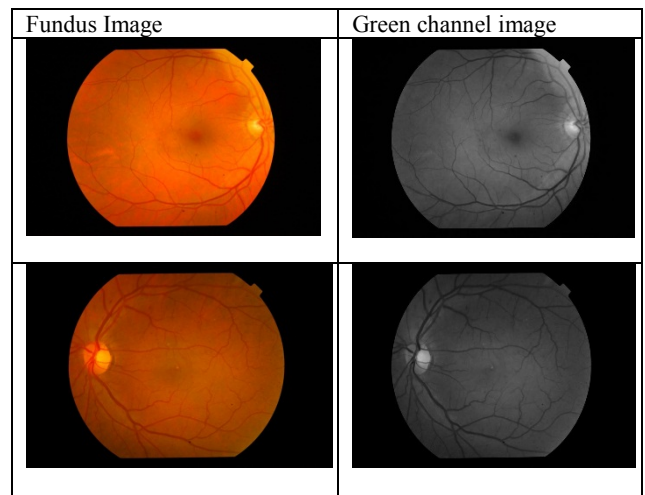

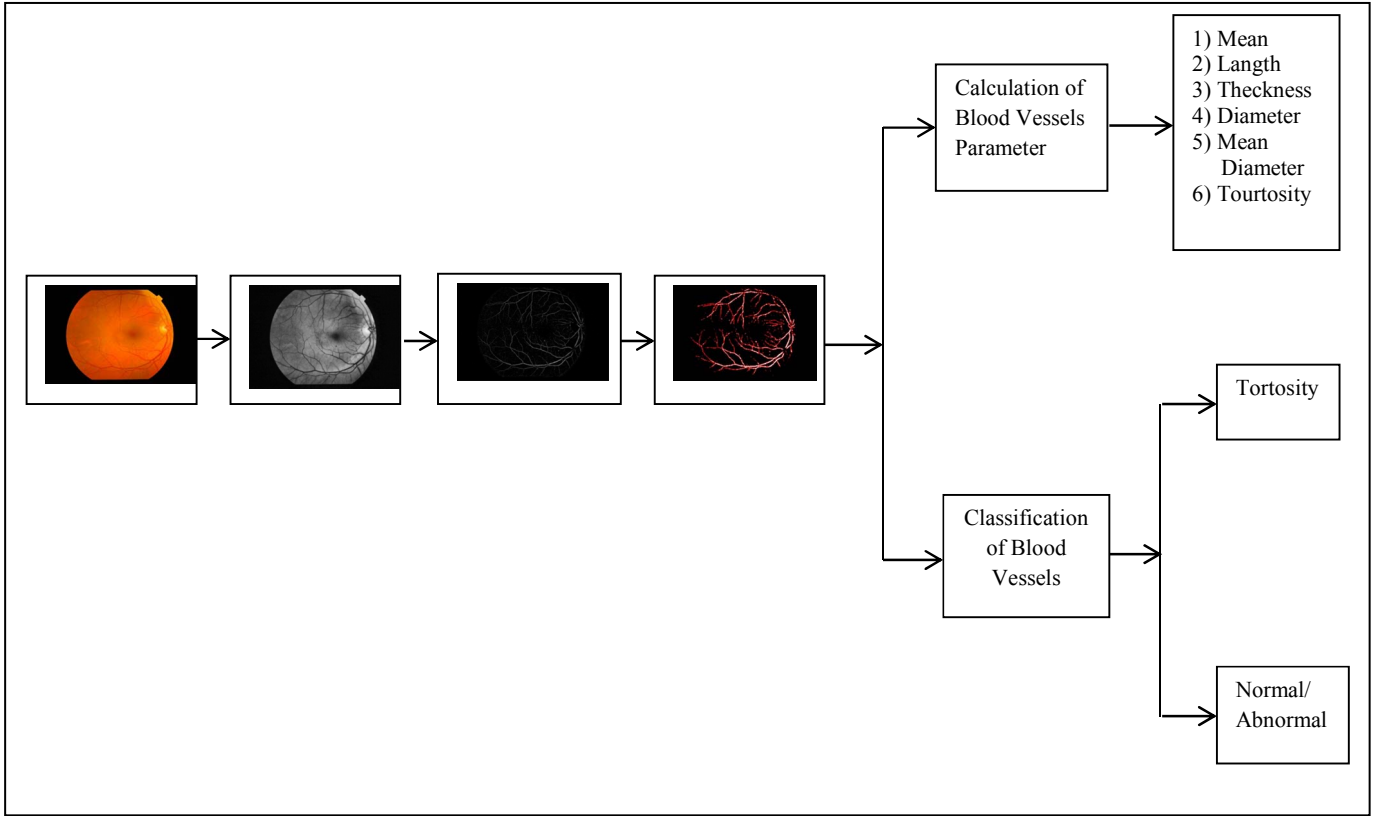


Figure 2: Flow for Classification and Calculation of Retinal Blood vessels Parameters

Mathematical formula for finding green channel is as follows

$$g = \frac{G}{(R + G + B)} \quad (1)$$

Here  $g$  is a Green channel and  $R$ ,  $G$  and  $B$  are Red, Green and Blue respectively.

## 2.2 BLOOD VESSELS

### 2.2.1 BLOOD VESSELS ENHANCEMENT

Then we have use the complement function for enhancing the blood vessels o the retina.

$$A^c = \{\omega \mid \omega \notin A\} \quad (2)$$

Here  $A^c$  is a complement,  $\omega$  is the element of  $A$ ,  $\notin$  stands for not an element of  $A$  and  $A$  is set.

Then we have use Histogram equalization function for enhancing the complementary image.

$$h(v) = \text{round} \left( \frac{\text{cdf}(v) - \text{cdf}_{\min}}{(M \times N) - \text{cdf}_{\min}} \times (L - 1) \right) \quad (3)$$

Here  $\text{cdf}_{\min}$  is the minimum value of the cumulative distribution function,  $M \times N$  gives the image's number of pixels and  $L$  is the number of grey levels.

As shown in the figure 3, we have use the Morphological structuring element for highlighting the blood vessels of the retina.

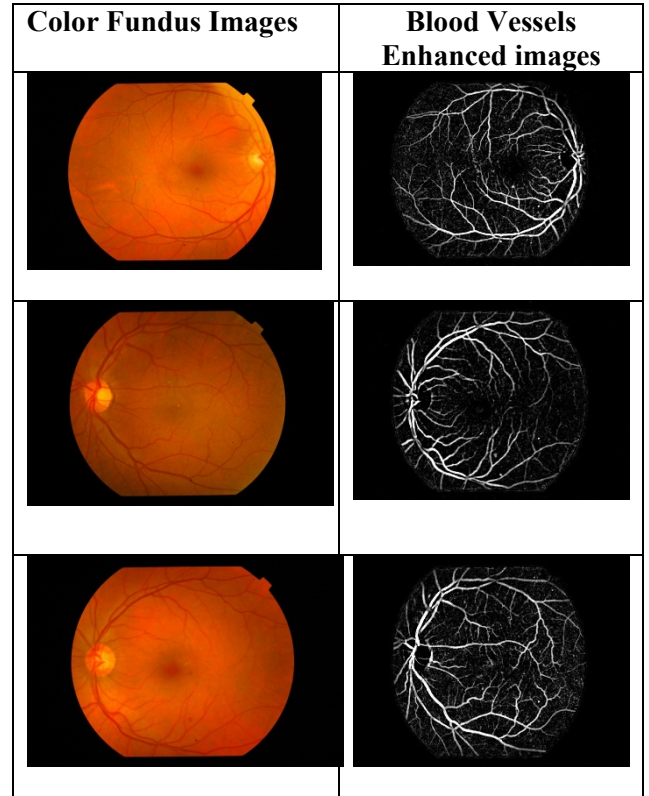


Figure 3: Fundus image and Blood vessels Enhanced images

### 2.2.2 BLOOD VESSELS EXTRACTION

$$I_{\text{dilated}}(i, j) = \max_{f(n, m) = \text{true}} I(i + n, j + m) \quad (4)$$

$$I_{\text{eroded}}(i, j) = \min_{f(n, m) = \text{true}} I(i + n, j + m) \quad (5)$$

We have use the Morphological open function for thickening the retinal blood vessels.

$$A \circ B = (A \ominus B) \oplus B \quad (6)$$

Here  $A \circ B$  is morphological opening,  $\ominus$  is Erosion and  $\oplus$  is Dilation.

We have used 2D median filter for highlighting and removing noise from the Morphological open function.

$$y[m, n] = \text{median}\{x[i, j], (i, j) \in \omega\} \quad (7)$$

Here  $\omega$  Represents a neighborhood centered around location(m,n) in the image.

Then we have use the Threshold function for extracting the retinal blood vessels, result images are shown in the figure 4.

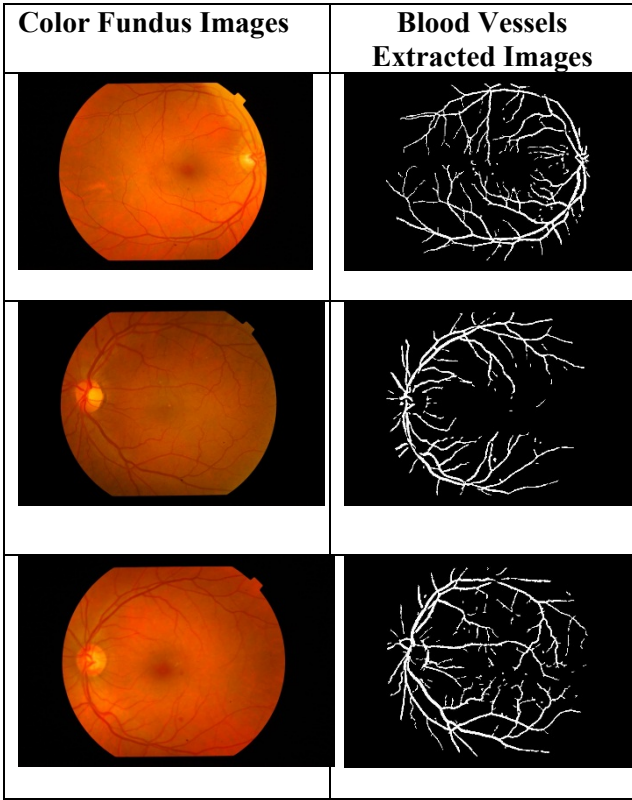


Figure 4: Fundus images and Images obtained using Threshold to Extract Blood Vessels

### 2.3 DETECTION OF BOUNDARIES USING SEGMENTATION

The segment label  $c(\vec{x}) = k$  for a pixel  $\vec{x}$  is the  $k$  which maximizes the ownership of  $\vec{F}(\vec{x})$  in the MoG model  $M$ . That is,

$$c(\vec{x}) = \arg \max_k \left[ \frac{\pi_k g(\vec{F}(\vec{x}) | \vec{m}_k, \Sigma_k)}{p(\vec{F}(\vec{x}) | M)} \right] \quad (8)$$

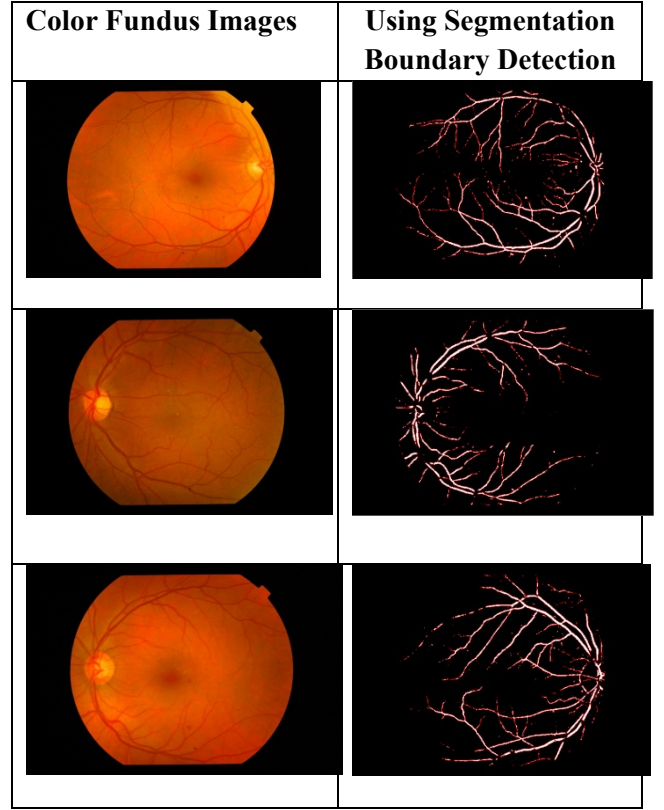


Figure 5: Fundus images and Images showing Boundaries

### 3. RESULT

For this algorithm we have designed one GUI in MATLAB, shown in the figure 6, for result analysis we have used Receiver Operating Characteristic Curve (ROC). ROC curve for Saswade database, this algorithm achieves a true positive rate of 96%, false positive rate of 0% and accuracy score 0.9202. Roc for Diaretdb0 this algorithm achieves a true positive rate of 95%, false positive rate of 0%, and accuracy score of 0.9514, on diaretdb1 this algorithm achieves a true positive rate of 96%, false positive rate of 0%, and accuracy score of 0.9665 and on DRIVE this algorithm achieves a true positive rate of 98%, false positive rate of 0%, and accuracy score of 0.9802 and also used some statistical techniques for result analysis.

$$\text{Sensitivity} = \frac{TP}{TP + FN} \quad (9)$$

$$\text{Specificity} = \frac{TN}{TN + FP} \quad (10)$$

**Table 1: Shows Sensitivity, Specificity and Accuracy**

No.	Database	Sensi- tivity	Speci- ficity	ROC	Accuracy
1	Saswade	0.92	0	0.9202	96%
2	Diaretdb0	0.95	0	0.9514	95%
3	Diaretdb1	0.96	0	0.9665	96%
4	DRIVE	0.98	0	0.9802	98%

**Table 2: Tortuosity ground truth versus Tortuosity on proposed algorithm**

Sr. No	Fundus Image	Ground Truth	Proposed algorithm
1	1	3.8000	3.5
2	2	4	4
3	3	2.8284	2.8
4	4	3.3282	3.32
5	5	1.9415	1.415
6	6	3.4110	3.4110
7	7	1.9612	1.9612
8	8	1.7461	1.461
9	9	1.2500	1.2500
10	10	2.2993	2.2993
11	11	2.3684	2.684
12	12	0	0
13	13	2.2361	2.2361
14	14	2	2
15	15	3.1378	3.138
16	16	0	0
17	17	1.7219	1.7219
18	18	2.0580	2.050
19	19	1.1926	1.1926
20	20	14.1421	14.21

**Mean**

$$\text{Mean} = \frac{\text{Sum of all elements}}{\text{Total No of elements}} \quad (11)$$

$$\text{Mean (X)} = \frac{584.0626}{204} = 2.8$$

$$\text{Mean (Y)} = \frac{581.9304}{204} = 2.848039216$$

**Variance**

$$\text{Variance} = \frac{\sum(x - \bar{X})}{N} \quad (12)$$

$$\text{Variance} = \frac{\sum(x - \bar{X})}{N} = \frac{0.0626}{204} = 3.0867$$

$$\text{Variance} = \frac{\sum(y - \bar{Y})}{N} = \frac{0.9304}{204} = 0.0046$$

**Standard Deviation**

$$\text{Standard Deviation} = \sqrt{\text{Variance}(x)} \quad (13)$$

$$\text{Standard Deviation (x): } \sqrt{\text{Variance}(x)} = \sqrt{3.0867} = 1.75$$

$$\text{Standard Deviation (y): } \sqrt{\text{Variance}(y)} = \sqrt{0.0046} = 0.067$$

**Correlation**

$$s = \frac{1}{N-1} \sum_{i=1}^n (x_i - \bar{X})(y_i - \bar{Y}) \quad (14)$$

$$S = \frac{1}{204} (0.0626)(0.9304)$$

$$S = \frac{1}{204} (0.058)$$

$$s = 2.855050$$

**Pearsons coefficient of correlation**

$$r_{xy} = \frac{\sum xy}{N\sigma_x\sigma_y} \quad (15)$$

Where,

$$xy = 2759.9579 \quad N = 204,$$

$$\sigma_x = 1.75 \quad \sigma_y = 0.067$$

$$r_{xy} = \frac{2759.9579}{204 \times 1.75 \times 0.067} = \frac{2759.9579}{23.919} = 115.38$$

**Product moment correlation coefficient**

$$N = 204 \quad \sum y = 581.93$$

$$\sum x = 584.06 \quad \sum y^2 = 338642.52$$

$$\sum x^2 = 341126.08 \quad \sum xy = 2759.95$$

$$\begin{aligned}
S_{xy} &= \sum xy - \left( \sum x \sum y \div N \right) \\
&= 2759.95 - (584.06 \times 581.93 \div 204) \\
&= 2759.95 - (1666.08) \\
&= 1093.87
\end{aligned}$$

$$\begin{aligned}
S_{xx} &= \sum xx - \left( \sum x \sum x \div N \right) \\
&= 2766.55 - (584.06 \times 584.06 \div 204) \\
&= 2766.55 - (341126.08 \div 204) \\
&= 2766.55 - (1672.18) \\
&= 1094.37
\end{aligned}$$

$$\begin{aligned}
S_{yy} &= \sum yy - \left( \sum y \sum y \div N \right) \\
&= 2756.98 - (581.93 \times 581.93 \div 204) \\
&= 2756.98 - (338642.52 \div 204) \\
&= 2756.98 - (1660.01) \\
&= 1096.97
\end{aligned}$$

$$\begin{aligned}
r &= \frac{S_{xy}}{\sqrt{S_{xx} S_{yy}}} = \frac{1093.87}{\sqrt{1094.37 \times 1096.97}} \\
&= \frac{1093.87}{1095.66} \\
&= 0.99 \\
&= 1
\end{aligned}$$

Therefore, the Product moment correlation coefficient has the strong positive correlation. Hence it is prove that the proposed algorithm works well. Following figures 11 and 12 shows the normalization graph over the ground truth and proposed algorithm for blood vessels parameters. In this graph near about all values are same which proves that the proposed system for extraction of retinal blood vessels parameter achieves good results.

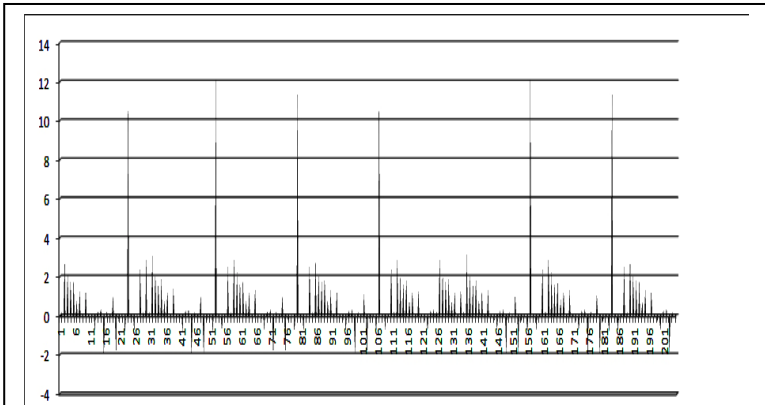


Figure 7: Normalization curve for Ground Truth

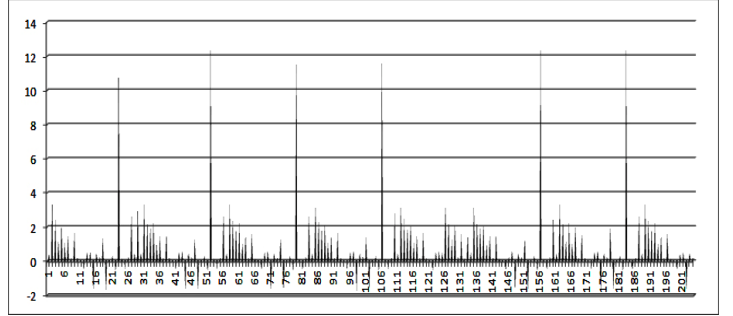


Figure 8: Normalization curve for proposed algorithm

#### 4. CONCLUSION

In this algorithm we have used Image processing techniques for extracting the blood vessels of the retina and detecting the bifurcation points of the extracted blood vessels. For performing these techniques we have used database from Dr. Manoj Saswade, Dr. Neha Deshpande and online available databases diaretdb0, diaretdb1 and DRIVE. This algorithm for Saswade database achieves accuracy of 96% with 0.92 sensitivity and 0 specificity, for diaretdb0 accuracy 95% sensitivity and specificity 0, accuracy 96% with 0.96 sensitivity and specificity 0 for diaretdb1 and for DRIVE 98% with 0.98 sensitivity and specificity 0 respectively and also used statistical techniques.

#### 5. ACKNOWLEDGMENTS

We are thankful to University Grant Commission (UGC) for providing us a financial support for the Major Research Project entitled “Development of Color Image Segmentation and Filtering Techniques for Early Detection of Diabetic Retinopathy” F. No.: 41 – 651/2012 (SR) also we are thankful to DST for providing us a financial support for the major research project entitled “Development of multi resolution analysis techniques for early detection of non-proliferative diabetic retinopathy without using angiography” F.No. SERB/F/2294/2013-14. We are thankful to Dr. Manoj Saswade, Director “Saswade Eye Clinic” Aurangabad and Dr. Neha Deshpande,

Director “Guruprasad Netra Rungnalaya pvt. Ltd”, Samarth Nagar, Aurangabad for providing the Database and accessing the Result.

## 6. REFERENCES

- [1] Wong LY, U’Rajendra A, Venkatesh YV, Caroline C, Lim CM, Ng EYK: Identification of different stages of Diabetic retinopathy using retinal optical images. *Inf Sci* 2008, 178:106-121.
- [2] Rangaraj M. Rangayyan,1 Xiaolu Zhu,1 Fábio J. Ayres,1 and Anna L. Ells2 “Detection of the Optic Nerve Head in Fundus Images of the Retina with Gabor Filters and Phase Portrait Analysis” *Journal of Digital Imaging*, Vol 23, No 4 (August), 2010: pp 438Y453
- [3] Manjiri B. Patwari, Dr. Ramesh R. Manza, Yogesh M. Rajput, Dr. Manoj Saswade, Dr. Neha K. Deshpande, Sangramsing N. Kayte,” Calculation of Retinal Blood vessels Tortuosity by using Image processing Techniques and Statistical Techniques”, 2nd International Conference on System Modeling & Advancement in Research Trends (SMART) Department of Computer Applications, TMIMT ,Teerthanker Mahaveer University, published in *Academic Journal online (AJO)*, *International Journal of Trends in Computer Science*, ISSN: 7462 – 8452, Volume 2, Issue 11, 2013.
- [4] Manjiri B. Patwari, Ramesh R. Manza, Yogesh M. Rajput, Manoj Saswade, Neha K. Deshpande, “Detection and Counting the Microaneurysms using Image Processing Techniques *International Journal of Applied Information Systems (IJ AIS)* – 6(5):11-17, November 2013. Published by Foundation of Computer Science, New York, USA., ISSN : 2249-0868, Vol. 6 Number 5, October - 2013, Impact Factor 1.187
- [5] Fischer JG, Mewes H, Hopp HH, Schubert R. Analysis of pressurized resistance vessel diameter changes with a low cost digital image processing device. *Comput Meth Prog Bio.* 1996;50:23–30.
- [6] Manjiri B. Patwari, Dr. Ramesh R. Manza, Yogesh M. Rajput, Dr. Manoj Saswade, Dr. Neha K. Deshpande, “Automatic Detection of Retinal Venous Beading and Tortuosity by using Image Processing Techniques”, *International Journal in Computer Application(IJCA)*, February 2014, ISBN : 973-93-80880-06-7, Impact Factor 0.821
- [7] <http://www.answers.com/topic/blood-vessel>
- [8] For drawing ROC Curve <http://www.vassarstats.net/roc1.html>
- [9] Manjiri B. Patwari, Dr. Ramesh R. Manza, Dr. Manoj Saswade and Dr. Neha Deshpande, “A Critical Review of Expert Systems for Detection and Diagnosis of Diabetic Retinopathy”, *Ciit International Journal of Fuzzy Systems*, February 2012, DOI: FS022012001 ISSN 0974-9721, 0974-9608. (IF 0.441).
- [10] Yogesh M. Rajput, Ramesh R. Manza, Manjiri B. Patwari, Neha Deshpande, “Retinal Blood Vessels Extraction Using 2D Median Filter”, Third National Conference on Advances in Computing(NCAC-2013), 5th to 6th March 2013, School of Computer Sciences, North Maharashtra University, Jalgaon-425001 (MS) India.
- [11] Yogesh M. Rajput, Ramesh R. Manza, Manjiri B. Patwari, Neha Deshpande, “Retinal Optic Disc Detection Using Speed Up Robust Features”, National Conference on Computer & Management Science [CMS-13], April 25-26, 2013, Radhai Mahavidyalaya, Aurnagabad-431003(MS India).
- [12] Manjiri B. Patwari, Ramesh R. Manza, Yogesh M. Rajput, Manoj Saswade, Neha K. Deshpande, “Review on Detection and Classification of Diabetic Retinopathy Lesions Using Image Processing Techniques”, *International Journal of Engineering Research & Technology (IJERT)*, ISSN: 2278-0181, Vol. 2 Issue 10, October - 2013, Impact Factor 1.76
- [13] Manjiri B. Patwari, Ramesh R. Manza, Yogesh M. Rajput, Neha K. Deshpande, Manoj Saswade, “Extraction of the Retinal Blood Vessels and Detection of the Bifurcation Points”, *International Journal in Computer Application(IJCA)*, September 18, 2013. ISBN : 973-93-80877-61-7, Impact Factor 0.821

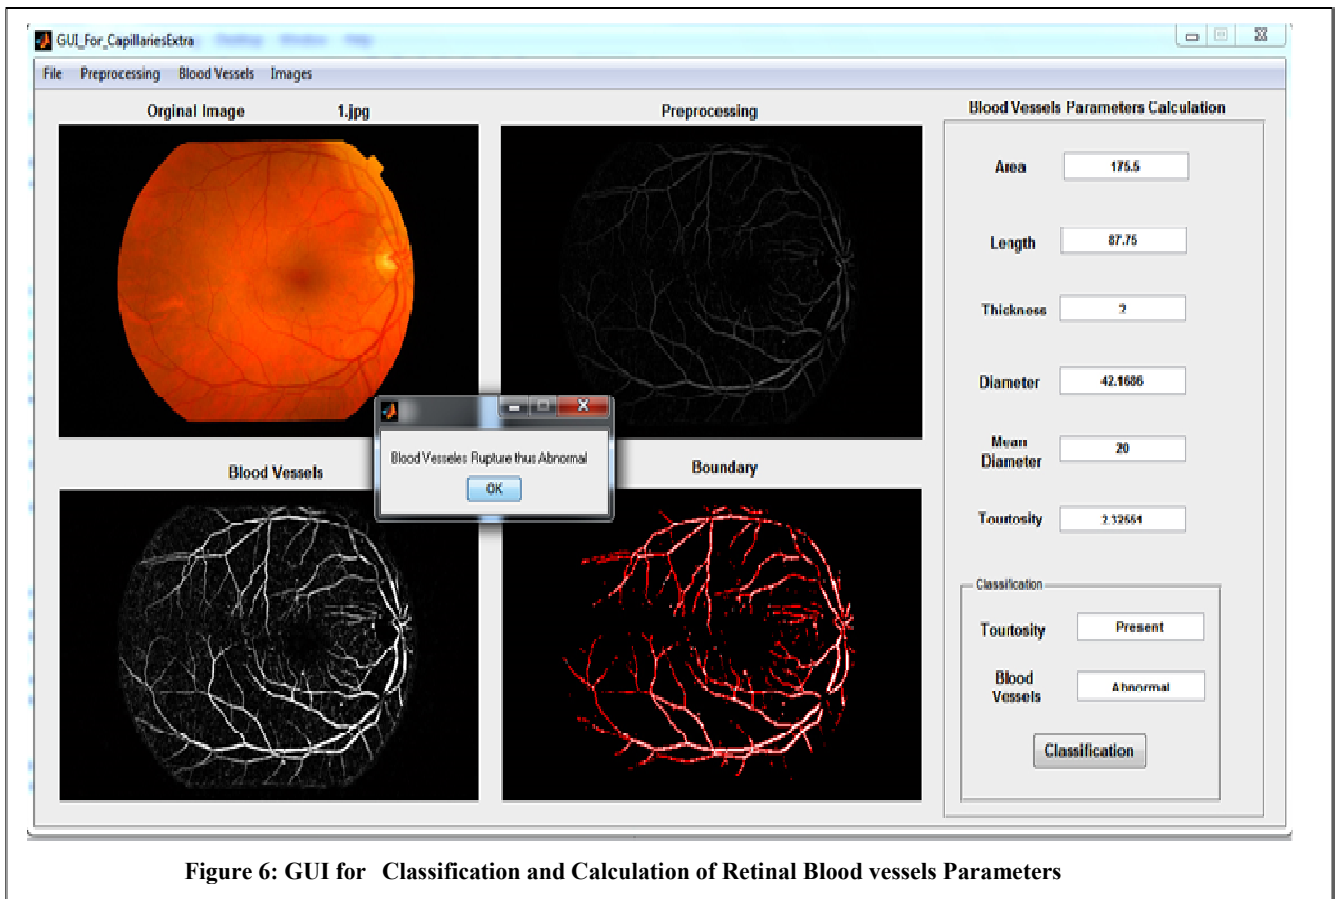


Figure 6: GUI for Classification and Calculation of Retinal Blood vessels Parameters